

## QDDC-30-80-1K5-50-NS

0.03~0.08GHz, 1500W, 50dB

**Features:**

\* Low Insertion Loss

**Applications:**

- \* Amplifiers
- \* Transmitter
- \* Laboratory Test
- \* Radar

**Electrical**

Frequency:	0.03~0.08GHz
Insertion Loss:	0.2dB max.
VSWR (Mainline):	1.1 max.
Directivity:	20dB min.
Flatness:	±0.4dB max
Coupling:	50±1dB
Average Power:	1500W
Impedance:	50Ω

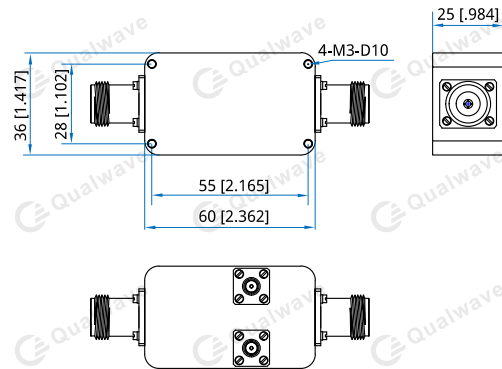
**Mechanical**

Size <sup>*1</sup> :	60*36*25mm 2.362*1.417*0.984in
RF Connectors:	N female
Coupling Connectors:	SMA female
Mounting:	4-M3, depth 10mm

[1] Exclude connectors

**Environmental**

Operating Temperature:	-40~+85°C
------------------------	-----------

**Outline Drawings**


Unit: mm [in]

Tolerance: ±0.3mm [±0.012in]

**How To Order**

**QDDC-30-80-1K5-50-NS**

Customization is available upon request.