

# QDDC-30-80-2K-60-NS

0.03~0.08GHz, 2000W, 60dB

**Features:**

\* Low Insertion Loss

**Applications:**

- \* Amplifiers
- \* Transmitter
- \* Laboratory Test
- \* Radar

**Electrical**

Frequency:	0.03~0.08GHz
Insertion Loss:	0.2dB max.
VSWR (Mainline):	1.1 max.
Directivity:	20dB min.
Flatness:	±0.4dB max
Coupling:	60±1dB
Average Power:	2000W
Impedance:	50Ω

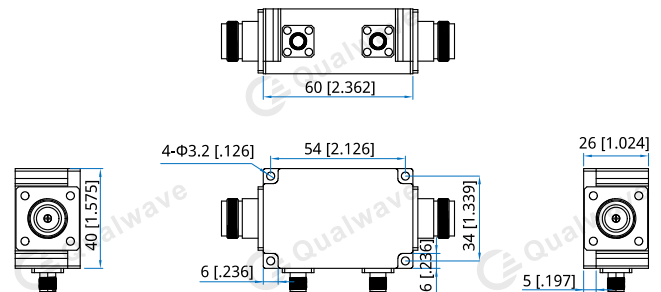
**Mechanical**

Size <sup>*1</sup> :	60*40*26mm 2.362*1.575*1.024in
RF Connectors:	N male
Coupling Connectors:	SMA female
Mounting:	4-Φ3.2mm through hole

[1] Exclude connectors

**Environmental**

Operating Temperature:	-40~+85°C
------------------------	-----------

**Outline Drawings**


Unit: mm [in]

Tolerance: ±0.3mm [±0.012in]

**How To Order**
**QDDC-30-80-2K-60-NS**

Customization is available upon request.