

QDDC-600-2700-K8-50-NS

0.6~2.7GHz, 800W, 50dB

Features:

* Low Insertion Loss

Applications:

- * Amplifiers
- * Transmitter
- * Laboratory Test
- * Radar

Electrical


Frequency:	0.6~2.7GHz
Coupling:	50±1.2dB
VSWR (Mainline):	1.3 max.
Insertion Loss:	0.3dB max.
Directivity:	20dB min.
Average Power:	800W

Mechanical

Size ^{*1} :	85*44*26mm 3.346*1.732*1.024in
RF Connectors:	N female
Coupling Connectors:	SMA female
Mounting:	4-Φ5mm through-hole

[1] Exclude connectors

Outline Drawings

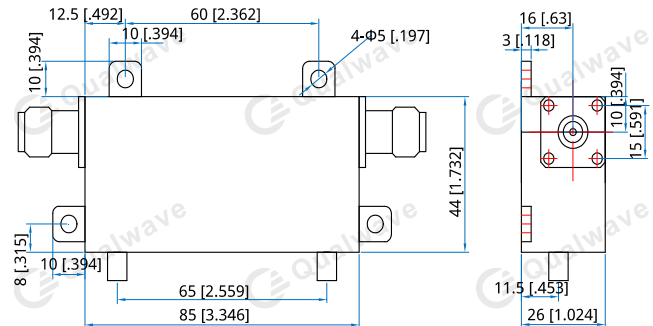

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

QDDC-600-2700-K8-50-NS

Customization is available upon request.