

QDDC-6000-8000-30-30-S

6~8GHz, 30W, 30dB

Features:
* Low Insertion Loss

Applications:
* Amplifiers
* Transmitter
* Laboratory Test
* Radar

Electrical

Frequency:	6~8GHz
Insertion Loss:	0.5dB max.
Coupling:	30±1dB max.
Frequency Sensitivity:	±1dB max.
Directivity:	16dB min.
VSWR:	1.3 max.
Average Power:	30W

Mechanical


Size ^{*1} :	66*15*11mm 2.598*0.591*0.433in
Connectors:	SMA Female
Mounting:	2-Φ2.2mm through hole

[1] Exclude connectors

Environmental

Temperature:	-40~+85°C
--------------	-----------

Outline Drawings

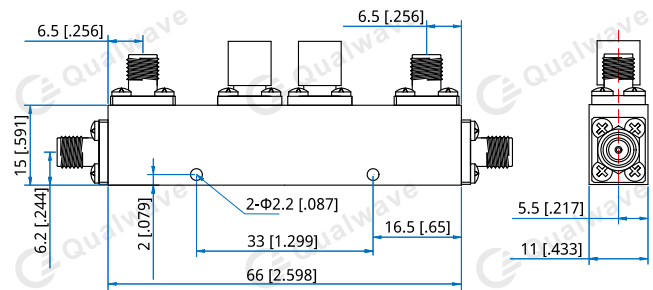

Unit: mm [in]

Tolerance: ±18mm [±0.012in]

How To Order

QDDC-6000-8000-30-30-S

Customization is available upon request.