

QELC-KF-5

2.92mm, DC~40GHz

- Features:**
- * Low VSWR
 - * No welding
 - * Reusable
 - * Easy installation

- Applications:**
- * Laboratory Test

Electrical

Frequency: DC~40GHz
 VSWR: 1.35 max.
 Impedance: 50Ω


Mechanical

RF Connector: 2.92mm female
 Outer Conductor: Gold plated brass
 Dielectric: PTFE
 Inner Conductor: Gold plated beryllium copper

Environmental

Temperature: -40~+105°C

Outline Drawings

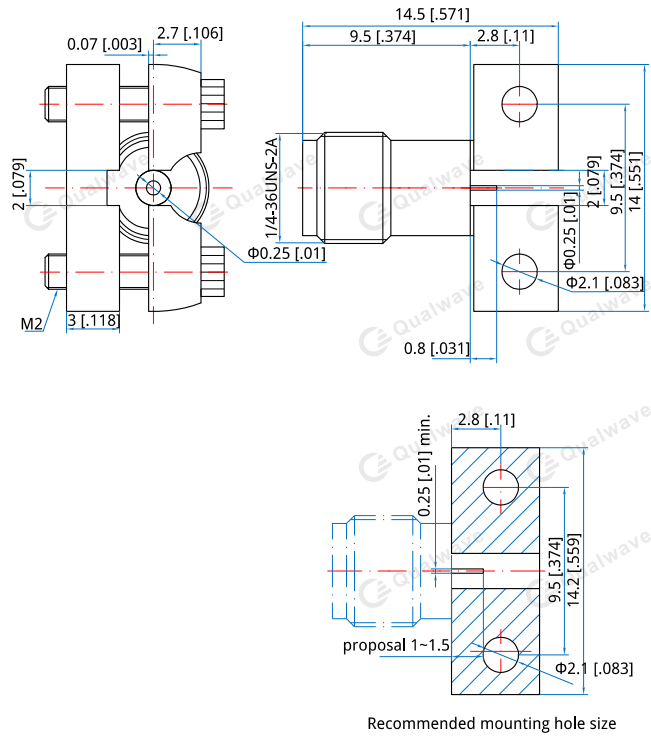

How To Order

QELC-KF-5

Customization is available upon request.

Unit: mm [in]
 Tolerance: ±0.2mm [±0.008in](Screw sleeve)