


QELC-S-1

SMA, DC~26.5GHz

- Features:
- * Low VSWR
 - * No welding
 - * Reusable
 - * Easy installation

- Applications:
- * Laboratory Test

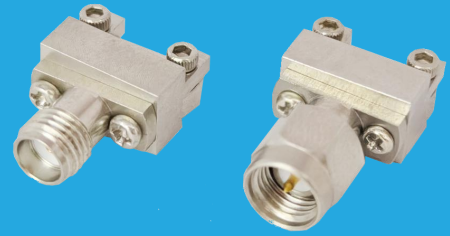

Electrical

Frequency: DC~26.5GHz
 VSWR: 1.25 max.
 Impedance: 50Ω

Mechanical

RF Connector: SMA
 Outer Conductor: Passivated stainless steel
 Dielectric: PEI & PTFE
 Inner Conductor: Gold plated beryllium copper

Environmental

Temperature: -55~+165°C


How To Order

QELC-S-1 - Outline A


QELC-SF-1 - Outline B

Customization is available upon request.

Outline Drawings

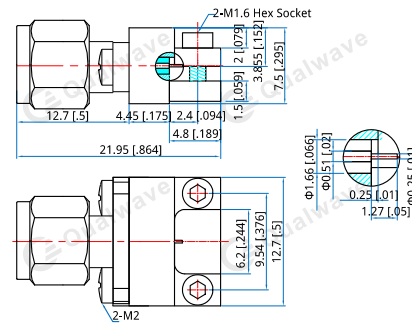


Outline A

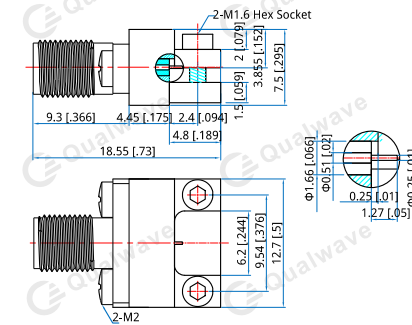

Outline B

PCB Layout



Unit: mm [in]
 Tolerance: ±0.2mm [±0.008in]