

## QE-5000-15000-S-4

5~15GHz, 4dB

Features:  
 \* Low VSWR  
 \* Small Size

Applications:  
 \* Amplifier  
 \* Laboratory Test  
 \* Instrumentation

### Electrical

Frequency:	5~15GHz
Insertion Loss:	2dB max.
VSWR:	1.6 max.
Slope:	4dB
Attenuation:	6dB @5GHz 2dB @15GHz
Linearity:	±0.6dB
Power Handling:	23dBm max.
Impedance:	50Ω

### Mechanical

Size <sup>*1</sup> :	30*20*12mm 1.181*0.787*0.472in
Connectors:	SMA Female
Mounting:	4-Φ2.2mm through-hole


[1] Exclude connectors.

### Environmental

Temperature:	-45~+75°C
--------------	-----------

### Outline Drawings

(The appearance is universal, and there may be slight variations in the appearance of this model.)

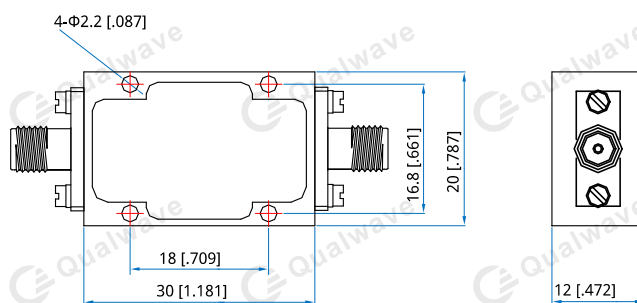

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

### How To Order

**QE-5000-15000-S-4**

Customization is available upon request.