



## QE-750-18000-S-25

0.75~18GHz, 25dB

Features: Applications:

\* Low VSWR \* Amplifier

\* Small Size \* Laboratory Test

\* Instrumentation

## **Electrical**

Frequency: 0.75~18GHz

Insertion Loss: 8.5±1dB @0.75GHz

1.2±1dB @18GHz

VSWR: 2 max. Slope: 25dB

Mechanical

Size\*1: 20\*16.8\*10mm

0.787\*0.661\*0.394in

Connectors: SMA Female


Mounting: 4-Φ2.5mm through-hole

[1] Exclude connectors.

**Environmental** 

Temperature: -40~+75°C

## **Outline Drawings**

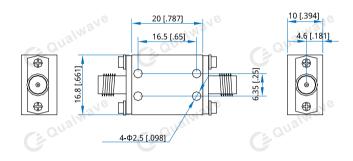

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

**How To Order** 

QE-750-18000-S-25

Customization is available upon request.