

QFA022K

DC~2GHz, 2000W

Features:
 * Low VSWR
 * High Attenuation Flatness

Applications:
 * Wireless
 * Transmitter
 * Laboratory Test
 * Radar

Electrical

Frequency: DC~2GHz
 Attenuation: 20, 30, 40, 50dB
 Impedance: 50Ω
 Average Power: 2000W@25°C max.
 Peak Power: 50KW (1mS pulse width)


Mechanical

Size: 840*330*840mm
 33.071*12.992*33.071in
 RF Connectors: 7/16 DIN female
 N female
 Housing: Aluminum
 Outer Conductor: Nickel plated brass
 Male Inner Conductor: Gold plated brass
 Female Inner Conductor: Gold plated phosphor copper
 Cooling: Oil cooling and air cooling

Environmental

Temperature: -40~+45°C

Outline Drawings

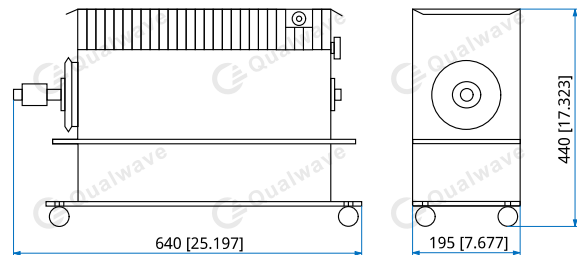

Unit: mm [in]
 Tolerance: ±2mm [±0.08in]

Expain:
 Replace the hexagon nut with the exhaust valve before startup, and replace the exhaust valve with the hexagon nut during transportation.

Attenuation Accuracy and VSWR

Frequency (GHz)	Attenuation Accuracy (±dB) vs. Attenuation (dB)				VSWR (max.)
	20	30	40	50	
DC~0.7	/	±1.0	±1.0	±1.0	1.2
0.7~2	/	/	/	/	1.3

How To Order

QFA022K-X-Y-Z

X: Frequency in GHz

Y: Attenuation in dB

Z: Connector type

Connector naming rules:

7F - 7/16 DIN female

NF - N DIN female

Examples:

To order an attenuator, DC~2GHz, 7/16 DIN female to N female, 30dB attenuation, specify QFA022K-1-30-7FNF.