

# QFA2620

## DC~26.5GHz, 20W

**Features:**

- \* Low VSWR
- \* High Attenuation Flatness

**Applications:**

- \* Wireless
- \* Transmitter
- \* Laboratory Test
- \* Radar

**Electrical**

Frequency:	DC~26.5GHz
Attenuation:	3dB, 6dB, 10dB, 20dB, 30dB
Impedance:	50Ω
Average Power <sup>*1</sup> :	20W@25°C max.
Peak Power:	200W (5μS pulse width, 10% duty cycle)

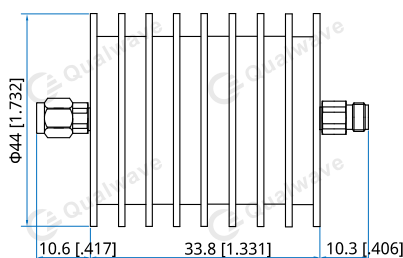
[1] Derated linearly to 2W@125°C.

**Mechanical**

RF Connectors:	SMA
Housing:	Aluminum
Dielectric:	PTFE
Outer Conductor:	Passivated stainless steel
Male Inner Conductor:	Gold plated brass
Female Inner Conductor:	Gold plated beryllium copper

**Environmental**

Temperature: -55~+125°C

**Outline Drawings**


Unit: mm [in]

Tolerance:  $\pm 2$ mm [ $\pm 0.08$ in]

**Attenuation Accuracy and VSWR**

Frequency (GHz)	Attenuation Accuracy ( $\pm$ dB) vs. Attenuation (dB)					VSWR (max.)
	3	6	10	20	30	
DC~26.5	-1.2/+1.2	-1.2/+1.2	-1.5/+1.5	-1.5/+1.5	-1.5/+1.5	1.3

**How To Order**
**QFA2620-X-Y-Z**

X: Frequency in GHz

Y: Attenuation in dB

Z: Connector type

Connector naming rules:

S - SMA

Examples:

To order an attenuator, DC~26.5GHz, SMA male to SMA female, 10dB attenuation, specify QFA2620-26.5-10-S.