

# QHF-26500-40000-60

## 26.5~40GHz, 60dB

**Features:**

- \* High Stopband Rejection
- \* Small Size

**Applications:**

- \* Telecom
- \* Laboratory Test
- \* Receivers
- \* Instrumentation

**Electrical**

Passband:	26.5~40GHz
Insertion Loss:	3dB max.
VSWR:	2 max.
Stopband Attenuation:	60dB @3-19GHz min.

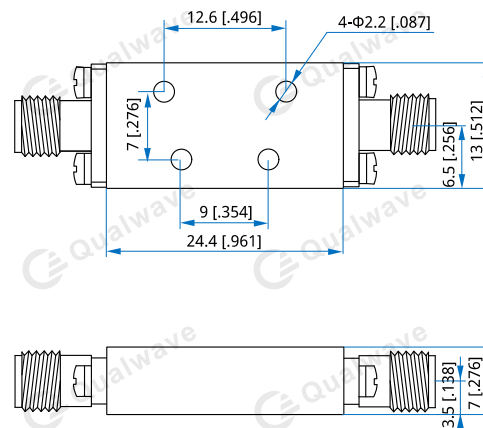
**Mechanical**

Size <sup>*1</sup> :	24.4*13*7mm
	0.961*0.512*0.276in
Connectors:	2.92mm Female

[1] Exclude connectors.

**Environmental**

Operating Temperature:	-45~+75°C
Non-operating Temperature:	-55~+85°C

**Outline Drawings**


Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

**How To Order**

**QHF-26500-40000-60**

Customization is available upon request.