

QHF-3000-18000-55

3~18GHz, 55dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Passband:	3~18GHz
Insertion Loss:	2.0dB max. @3~3.2GHz 1.0dB max. @3.2~18GHz
VSWR:	1.5 max.
Stopband Attenuation:	70dB min. @DC~2.6GHz 55dB min. @2.6~2.7GHz
Average Power:	15W max.
Impedance:	50Ω

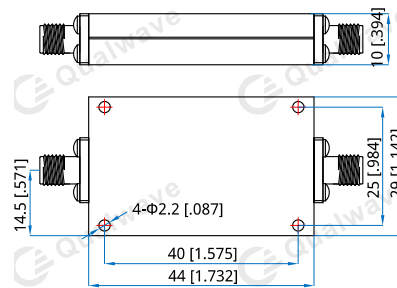
Mechanical

Size ^{*1} :	44*29*10mm 1.732*1.142*0.394in
Connectors:	SMA Female
Mounting:	4-Φ2.2mm through-hole

[1] Exclude connectors.

Environmental

Temperature:	-30~+70°C
--------------	-----------

Outline Drawings


Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

QHF-3000-18000-55

Customization is available upon request.