

QWT430-1K WR-430, 1000W

Features:
* Low VSWR

Applications:
* Transmitters
* Antennas
* Laboratory Test
* Impedance Matching

Electrical

Frequency: 2.17~3.3GHz
Average Power: 1000W max.
VSWR: 1.25 max.


Mechanical

Waveguide Size: WR-430 (BJ22)
Flange: FDP22
Material: Aluminium

Environmental

Temperature: 0~+30°C

Outline Drawings

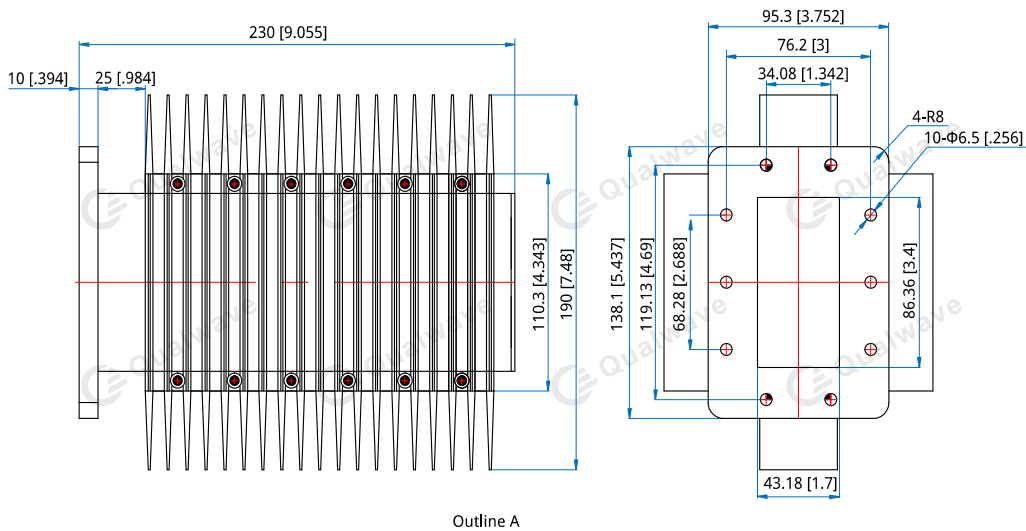

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

How To Order

QWT430-1K-Y-Z

Y : Material

Z : Flange type

Material naming rules:

A - Aluminum (Outline A)

Flange naming rules:

2 - FDP22 (Outline A)

Examples:

To order a high power waveguide termination, WR-430, 1000W, Aluminum, FDP22, specify QWT430-1K-A-2.

Customization is available upon request.