

QL-300-6000-10

0.3~6GHz, 10dBm

Features:
* Broadband

Applications:
* Wireless
* Transmitter
* Laboratory Test
* Radar

Electrical

| | |
|-----------------|------------|
| Frequency: | 0.3~6GHz |
| Insertion Loss: | 1.2dB max. |
| Flat Leakage: | 10dBm max. |
| VSWR: | 1.5 max. |
| Average Power: | 10W |
| Impedance: | 50Ω |

Mechanical


| | |
|----------------------|-----------------------------------|
| Size ^{*1} : | 20*13*13mm 0.787*0.512*0.512in |
| RF Connectors: | SMA Female |
| Mounting: | 2-Φ2.2mm through-hole |

[1] Exclude connectors.

Environmental

| | |
|------------------------|-----------|
| Operating Temperature: | -45~+75°C |
|------------------------|-----------|

Outline Drawings

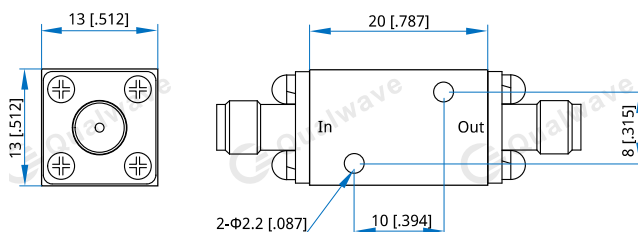

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

QL-300-6000-10

Customization is available upon request.