

QLAS-100-18000-35-40

0.1~18GHz, 35dB, 4dB

Features:
 * Broadband
 * Low Noise

Applications:
 * Wireless
 * Receiver
 * Laboratory Test
 * Radar

Electrical

Frequency:	0.1~18GHz
Gain:	35dB min.
Gain Flatness:	±3dB max.
Output Power (P1dB):	10dBm min.
Noise Figure:	4dB max.
Spurious:	-60dBc max.
VSWR:	2.5 max.
Voltage:	220V AC
Input Power:	+10dBm max.
Impedance:	50Ω

Mechanical

Size*1: 136*186*52mm
 5.354*7.323*2.047in

RF Connectors: SMA Female

[1] Exclude connectors, rack mount brackets, handles.

Environmental


Operating Temperature: -20~+50°C

Non-operating Temperature: -40~+85°C

How To Order

QLAS-100-18000-35-40

Outline Drawings

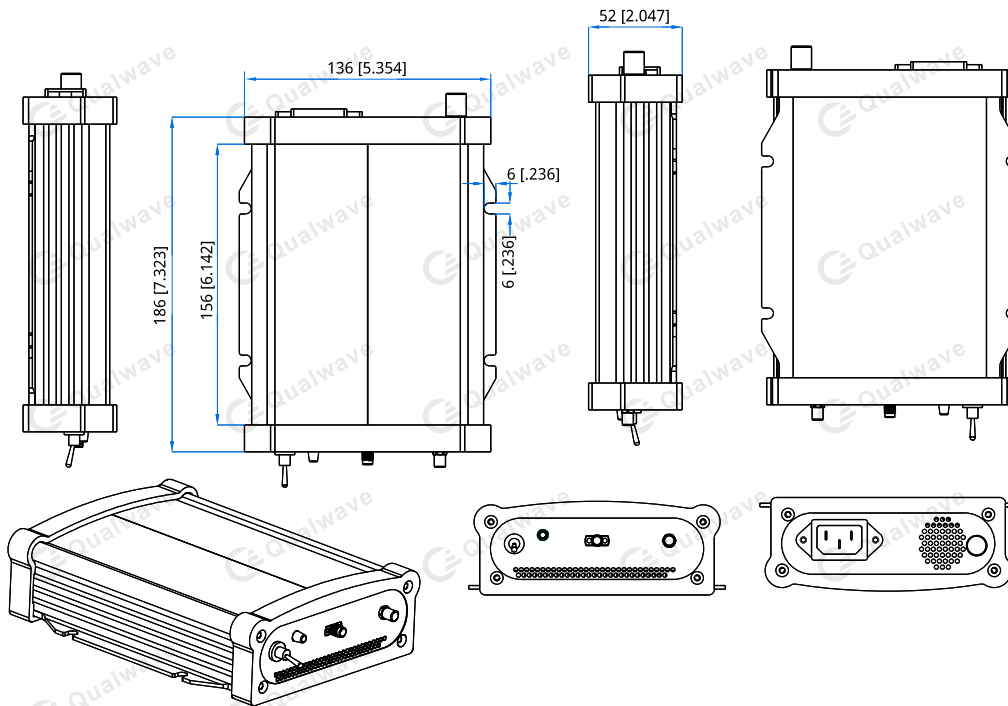

Unit: mm [in]
 Tolerance: ±0.2mm [±0.008in]

Customization is available upon request.