

QLAS-25-1000-50-13

25~1000MHz, 50dB, 1.3dB

Features:
 * Broadband
 * Low Noise

Applications:
 * Wireless
 * Receiver
 * Laboratory Test
 * Radar

Electrical

Frequency:	25~1000MHz
Gain:	50dB min.
Output Power (P1dB):	14dBm typ.
Noise Figure:	1.3dB max.
Spurious:	-60dBc max.
VSWR:	2.5 max.
Voltage:	80~270V AC
Input Power:	-25dBm max.
Impedance:	50Ω

Mechanical

Size*1: 136*186*52mm
 5.354*7.323*2.047in

RF Connectors: SMA Female

[1] Exclude connectors, rack mount brackets, handles.

How To Order


QLAS-25-1000-50-13

Customization is available upon request.

Environmental

Operating Temperature: -20~+50°C
 Non-operating Temperature: -40~+85°C

Outline Drawings

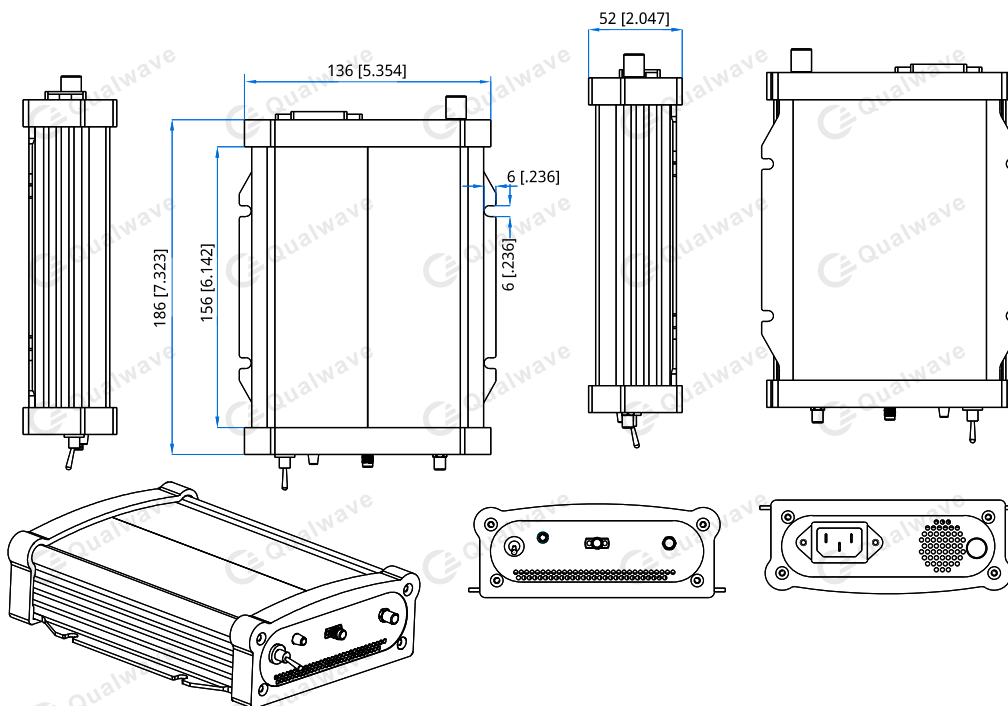

Unit: mm [in]
 Tolerance: ±0.2mm [±0.008in]