

QLA-1000-18000-40-32

1~18GHz, 40dB, 3.2dB

Features:
 * Broad Band
 * Low Noise

Applications:
 * Wireless
 * Receiver
 * Laboratory Test
 * Radar

Electrical

Frequency:	1~18GHz
Gain:	40dB min.
Gain Flatness:	±2dB typ.
Output Power (P1dB):	8dBm typ.
Noise Figure:	3.2dB typ.
Harmonic:	-15dBc typ.
Spurious:	-60dBc max.
Input VSWR:	1.8 typ.
Output VSWR:	1.8 typ.
Voltage:	+12V DC
Current:	300mA typ.

Mechanical


Size ^{*1} :	50*30*15mm 1.969*1.181*0.591in
RF Connectors:	SMA Female
Power Supply Connectors:	Feed Through/Terminal Post
Housing Material:	Aluminum
Mounting:	4-Φ2.2mm through-hole
Cooling:	External Heatsink (supplied on request only)

[1] Exclude connectors.

Environmental

Operating Temperature:	-20~+60°C
Non-operating Temperature:	-55~+85°C

Outline Drawings

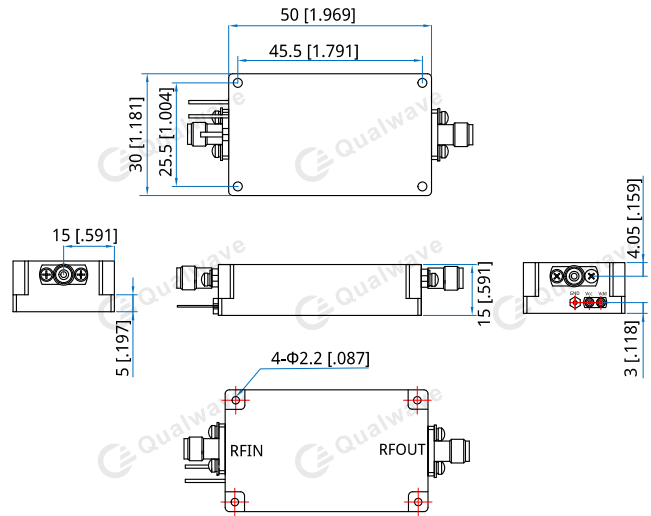

Unit: mm [in]
 Tolerance: ±0.2mm [±0.008in]

How To Order

QLA-1000-18000-40-32

Customization is available upon request.