

QLA-4000-12000-14-30

4~12GHz, 14dB, 3dB

Features:
 * Broad Band
 * Low Noise

Applications:
 * Wireless
 * Receiver
 * Laboratory Test
 * Radar

Electrical

Frequency:	4~12GHz
Gain:	14dB min.
Gain Flatness:	±2.0dB max.
Output Power (P1dB):	15dBm min.
Noise Figure:	3.0dB max.
VSWR:	2.0 max.
Voltage:	+12V typ.
Current:	60mA typ.
Impedance:	50Ω

Mechanical


Size ^{*1} :	27.2*17.8*7.4mm 1.071*0.701*0.291in
RF Connectors:	SMA Female
Power Supply Connectors:	Feed Through/Terminal Post

[1] Exclude connectors.

Environmental

Operating Temperature:	-40~+70°C
Non-Operating Temperature:	-55~+85°C

Outline Drawings

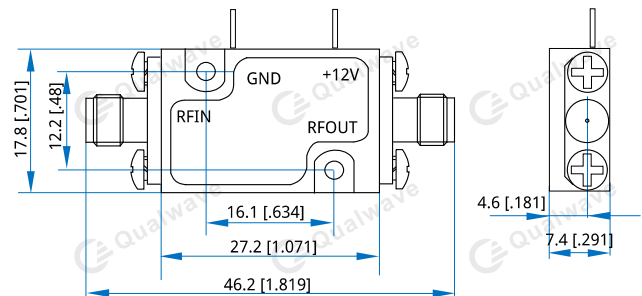

Unit: mm [in]
 Tolerance: ±0.2mm [±0.008in]

How To Order

QLA-4000-12000-14-30

Customization is available upon request.