

QLF-1400-50

DC~1.4GHz, 50dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Frequency:	DC~1.4GHz
Stop Band Attenuation:	50dB (@2GHz max.)
Insertion Loss:	2dB max.
VSWR:	1.6 max.
Input Power:	50W max.

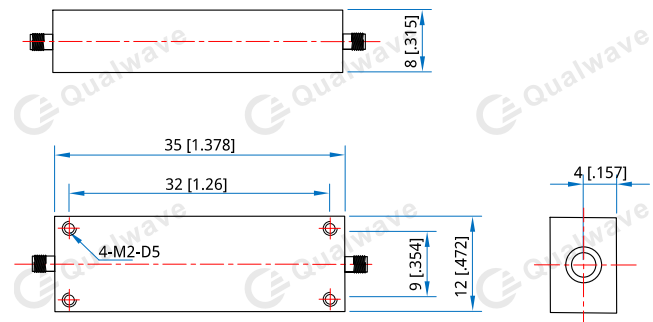
Mechanical

Size ^{*1} :	35*12*8mm 1.378*0.472*0.315in
RF Connectors:	SMA female
Mounting:	4-M2, depth 5mm

[1] Exclude connectors.

Environmental

Operating Temperature:	-40~+70°C
Non-operating Temperature:	-55~+85°C

Outline Drawings


Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

QLF-1400-50

Customization is available upon request.