

# QLF-18000-40

## DC~18GHz, 40dB

**Features:**

- \* High Stopband Rejection
- \* Small Size

**Applications:**

- \* Telecom
- \* Laboratory Test
- \* Receivers
- \* Instrumentation

**Electrical**

Frequency:	DC~18GHz
Stop Band Attenuation:	40dBc@20~38GHz min. 60dBc@36GHz min.
Insertion Loss:	2dB max.
VSWR:	2 max.

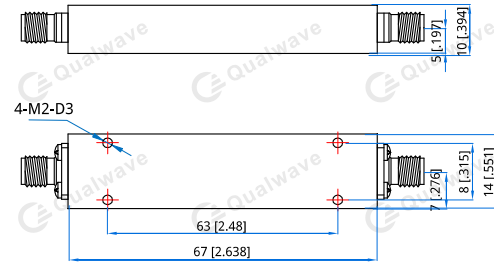
**Mechanical**

Size <sup>*1</sup> :	67*14*10mm 2.638*0.551*0.394in
RF Connectors:	2.92mm Female
Material:	Aluminum
Mounting:	4-M2, depth 3mm

[1] Exclude connectors.

**Environmental**

Operating Temperature:	-20~+55°C
------------------------	-----------

**Outline Drawings**


Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

**How To Order**

**QLF-18000-40**

Customization is available upon request.