

# QLF-330-60

## DC~0.33GHz, 60dB

**Features:**

- \* High Stopband Rejection
- \* Small Size

**Applications:**

- \* Telecom
- \* Laboratory Test
- \* Receivers
- \* Instrumentation

**Electrical**

Frequency:	DC~0.33GHz
Insertion Loss:	0.5dB max.
VSWR:	1.3 max.
Stop Band Attenuation:	60dB@0.643~3GHz min.
Average Power:	1W Max.
Impedance:	50Ω

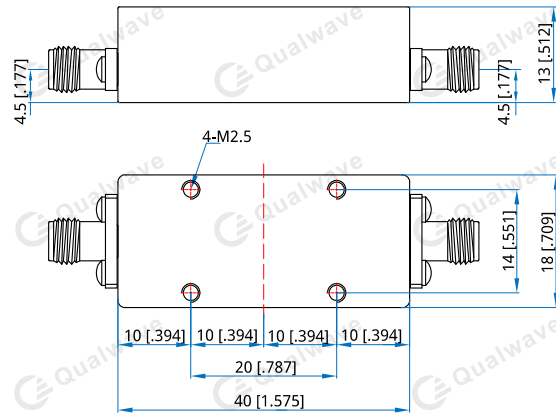
**Mechanical**

Size <sup>*1</sup> :	40*18*13mm 1.575*0.709*0.512in
RF Connectors:	SMA Female
Mounting:	4-M2.5 through-hole

[1] Exclude connectors

**Environmental**

Operating Temperature:	-30~+70°C
------------------------	-----------

**Outline Drawings**


Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

**How To Order**

**QLF-330-60**

Customization is available upon request.