

## QLF-4000-60

DC~4GHz, 60dB

**Features:**

- \* High Stopband Rejection
- \* Small Size

**Applications:**

- \* Telecom
- \* Laboratory Test
- \* Receivers
- \* Instrumentation

**Electrical**

Frequency:	DC~4GHz
Stopband Attenuation:	60dB@4.5~12.3GHz min.
Insertion Loss:	1dB@DC~3.8GHz max. 1.5dB@3.8~4GHz max.
VSWR:	1.3max.
Average Power:	15W max.
Impedance:	50Ω

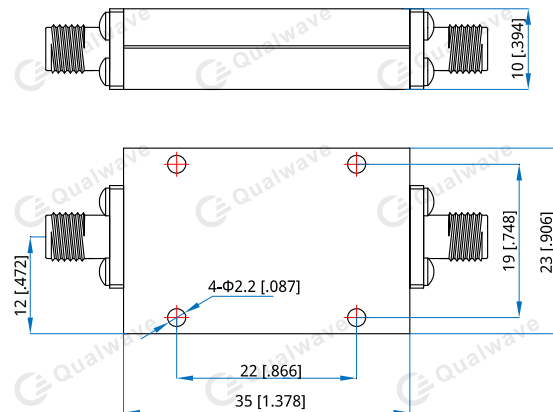
**Mechanical**

Size <sup>*1</sup> :	35*23*10mm 1.378*0.906*0.394in
RF Connectors:	SMA Female
Mounting:	4-Φ2.2mm through-hole

[1] Exclude connectors.

**Environmental**

Temperature:	-55~+85°C
--------------	-----------

**Outline Drawings**


Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

**How To Order**

**QLF-4000-60**

Customization is available upon request.