

QLF-45-20

DC~0.045GHz, 20dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

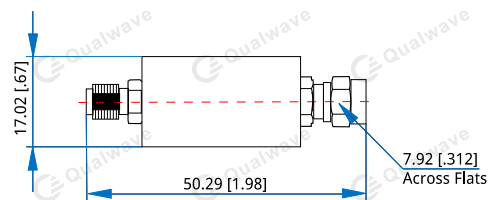
Frequency:	DC~0.045GHz
Insertion Loss:	1dB max.
VSWR:	1.7 typ.
Stop Band Attenuation:	20dB @ 70 ~ 90MHz min. 40dB @ 90 ~ 1600MHz min.
Average Power:	0.5W Max.
Impedance:	50Ω

Mechanical

Size:	50.29*17.02*7.92mm 1.98*0.67*0.312in
RF Connectors:	SMA Female SMA Male

Environmental

Operating Temperature:	-40~+85°C
Non-operating Temperature:	-55~+100°C

Outline Drawings


Unit: mm [in]

Tolerance: ±0.3mm [±0.012in]

How To Order
QLF-45-20

Customization is available upon request.