

## QLF-480-30

DC~0.48GHz, 30dB

**Features:**

- \* High Stopband Rejection
- \* Small Size

**Applications:**

- \* Telecom
- \* Laboratory Test
- \* Receivers
- \* Instrumentation

**Electrical**

Frequency:	DC~0.48GHz
Insertion Loss:	3dB max.
Passband Flatness:	3dB max.
VSWR:	1.5 max.
Stop Band Attenuation:	30dB@0.53~3GHz min.

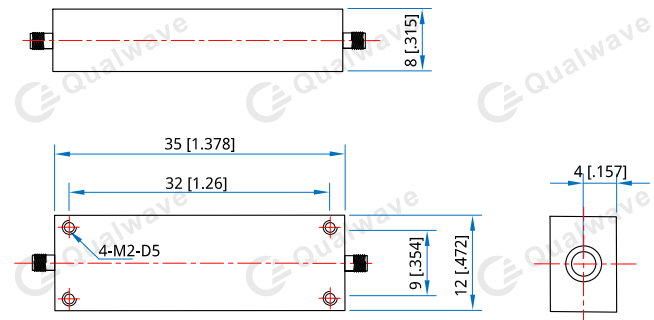
**Mechanical**

Size <sup>*1</sup> :	35*12*8mm 1.378*0.472*0.315in
RF Connectors:	SMA Female
Mounting:	4-M2 depth 5mm

[1] Exclude connectors

**Environmental**

Operating Temperature:	-40~+70°C
Non-operating Temperature:	-55~+85°C

**Outline Drawings**


Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

**How To Order**

**QLF-480-30**

Customization is available upon request.