

QLF-55-35

DC~0.055GHz, 35dB

Features:
 * High Stopband Rejection
 * Small Size

Applications:
 * Telecom
 * Laboratory Test
 * Receivers
 * Instrumentation

Electrical

Frequency:	DC~0.055GHz
Insertion Loss:	0.8dB max.
VSWR:	1.5 max.
Stop Band Attenuation:	35dB @ 70 ~ 200MHz min.
Average Power:	1W Max.
Impedance:	50Ω

Mechanical


Size ^{*1} :	30*18*13mm 1.181*0.709*0.512in
RF Connectors:	SMA Female
Mounting:	4-M2.5 through-hole

[1] Exclude connectors

Environmental

Operating Temperature:	-30~+70°C
------------------------	-----------

Outline Drawings

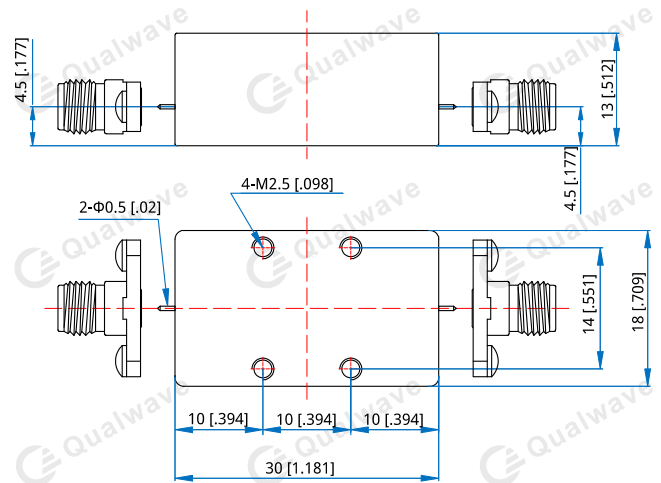

Unit: mm [in]
 Tolerance: ±0.3mm [±0.012in]

How To Order

QLF-55-35

Customization is available upon request.