

## QWT159-60

### WR-159, 60W

Features:  
\* Low VSWR

Applications:  
\* Transmitters  
\* Antennas  
\* Laboratory Test  
\* Impedance Matching

#### Electrical

Frequency: 4.64~7.05GHz  
Average Power: 60W  
VSWR: 1.03 max.


#### Mechanical

Waveguide Size: WR-159 (BJ58)  
Flange: FDP58

#### Environmental

Temperature: -55~+125°C

#### Outline Drawings

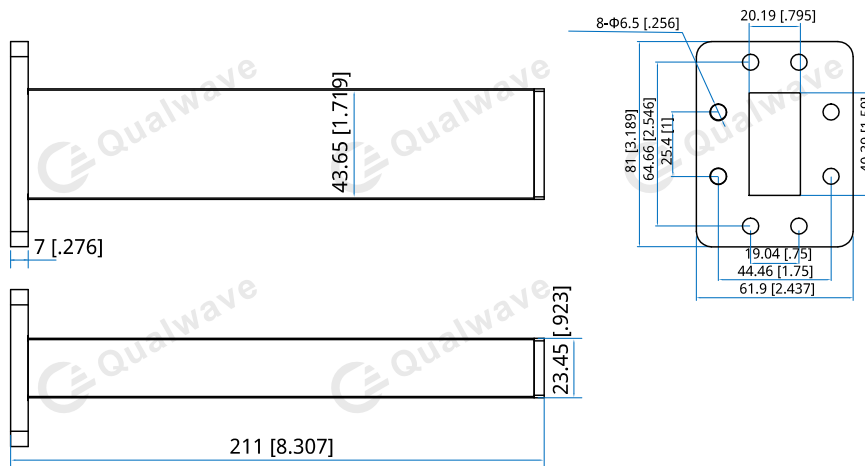

Outline A

Unit: mm [in]  
Tolerance: ±0.5mm [±0.02in]

#### How To Order

**QWT159-60-Y-Z**

Y : Material

Z : Flange type

Material naming rules:  
A - Aluminum (Outline A)

Flange naming rules:  
2 - FDP58 (Outline A)

Examples:

To order a low power waveguide termination, WR-159, 60W, Aluminum, FDP58, specify QWT159-60-A-2.

Customization is available upon request.