

QWT187-60

WR-187, 60W

Features:
* Low VSWR

Applications:
* Transmitters
* Antennas
* Laboratory Test
* Impedance Matching

Electrical

Frequency: 3.94~5.99GHz
Average Power: 60W
VSWR: 1.03 max.


Mechanical

Waveguide Size: WR-187 (BJ48)
Flange: FDP48

Environmental

Temperature: -55~+125°C

Outline Drawings

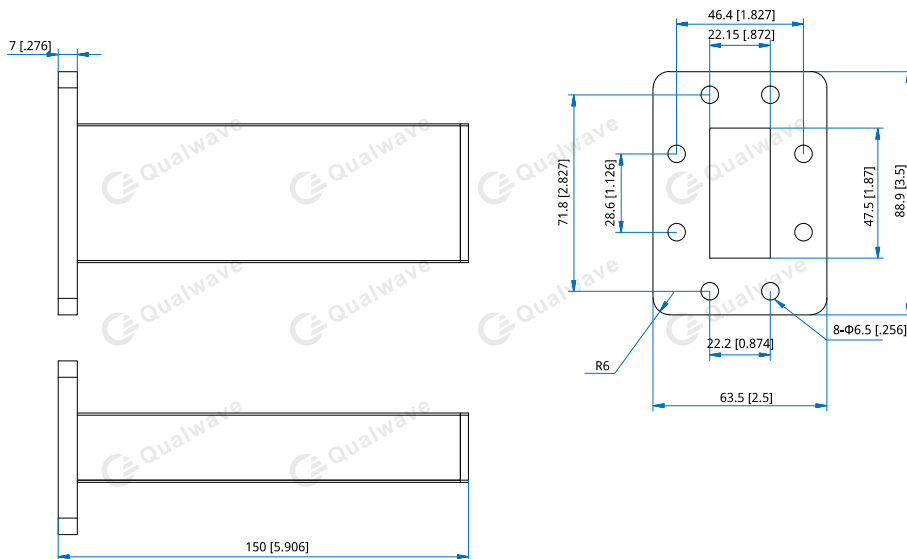

Outline A

Unit: mm [in]
Tolerance: $\pm 0.5\text{mm}$ [$\pm 0.02\text{in}$]

How To Order

QWT187-60-Y-Z

Y : Material

Z : Flange type

Material naming rules:
A - Aluminum (Outline A)

Flange naming rules:
2 - FDP48 (Outline A)

Examples:
To order a low power waveguide termination, WR-187, 60W, Aluminum, FDP48, specify QWT187-60-A-2.

Customization is available upon request.