

QWT19-5 WR-19, 5W

Features:
* Low VSWR

Applications:
* Transmitters
* Antennas
* Laboratory Test
* Impedance Matching

Electrical

Frequency: 39.2~59.6GHz
Average Power: 5W
VSWR: 1.05 max.


Mechanical

Waveguide Size: WR-19 (BJ500)
Flange: FUGP500

Environmental

Temperature: -55~+125°C

Outline Drawings

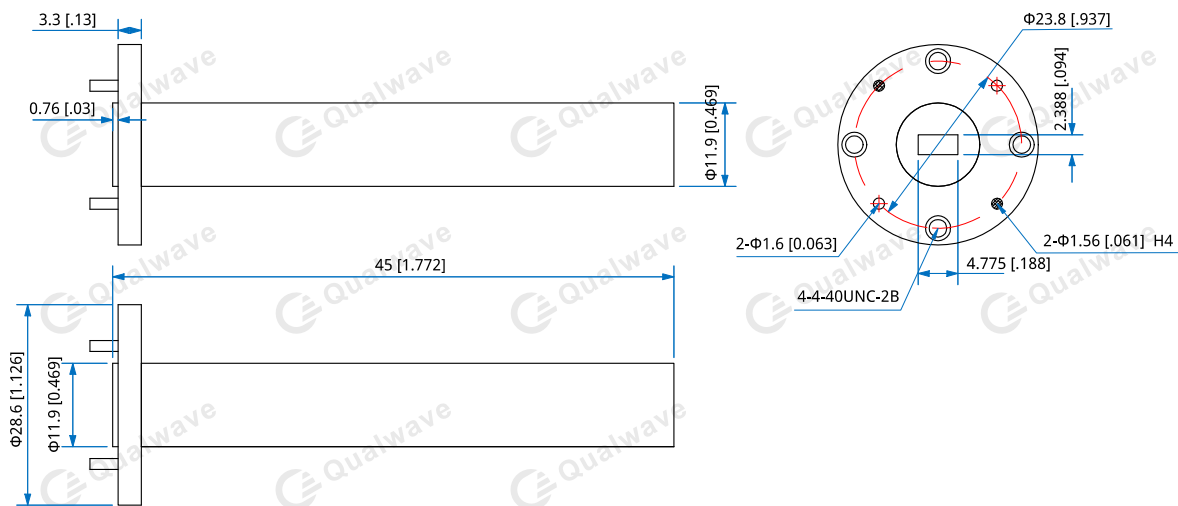

Outline A

Unit: mm [in]

Tolerance: $\pm 0.5\text{mm}$ [$\pm 0.02\text{in}$]

How To Order

QWT19-5-Y-Z

Y : Material

Z : Flange type

Material naming rules:

B: Brass (Outline A)

Flange naming rules:

10 - FUGP500 (Outline A)

Examples:

To order a low power waveguide termination, WR-19, 5W, Brass, FUGP500, specify QWT19-5-B-10.

Customization is available upon request.