

## QWT229-60 WR-229, 60W

Features:  
\* Low VSWR

Applications:  
\* Transmitters  
\* Antennas  
\* Laboratory Test  
\* Impedance Matching

### Electrical

Frequency: 3.22~4.9GHz  
Average Power: 60W  
VSWR: 1.03 max.


### Mechanical

Waveguide Size: WR-229 (BJ40)  
Flange: FDP40

### Environmental

Temperature: -55~+125°C

### Outline Drawings

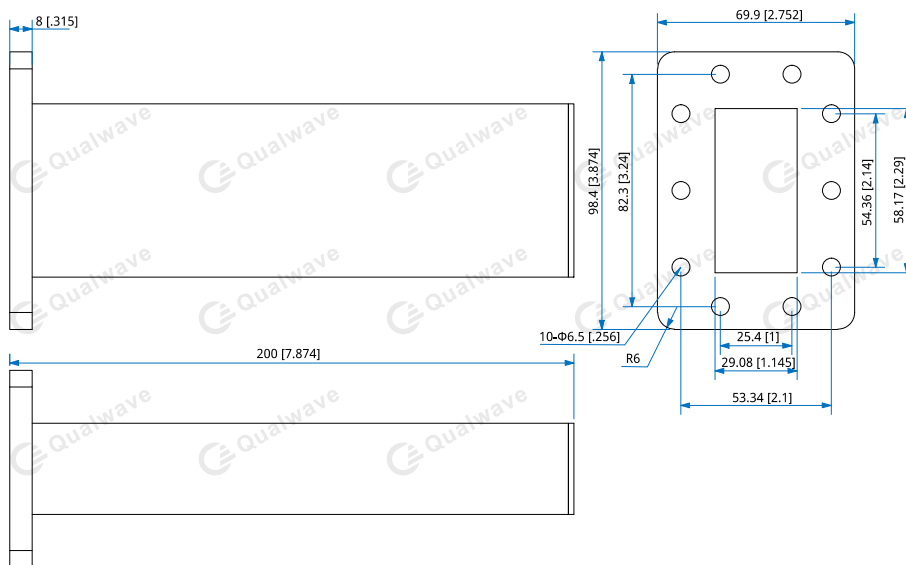

Outline A

Unit: mm [in]  
Tolerance:  $\pm 0.5$ mm [ $\pm 0.02$ in]

### How To Order

**QWT229-60-Y-Z**

Y : Material

Z : Flange type

Material naming rules:  
A - Aluminum (Outline A)

Flange naming rules:

2 - FDP40 (Outline A)

Examples:

To order a low power waveguide termination, WR-229, 60W, Aluminum, FDP40, specify QWT229-60-A-2.

Customization is available upon request.