

QWT430-K1

WR-430, 100W

Features:
* Low VSWR

Applications:
* Transmitters
* Antennas
* Laboratory Test
* Impedance Matching

Electrical

Frequency: 1.72~2.61GHz
Average Power: 100W
VSWR: 1.03 max.


Mechanical

Waveguide Size: WR-430 (BJ22)
Flange: FDP22

Environmental

Temperature: -55~+125°C

Outline Drawings

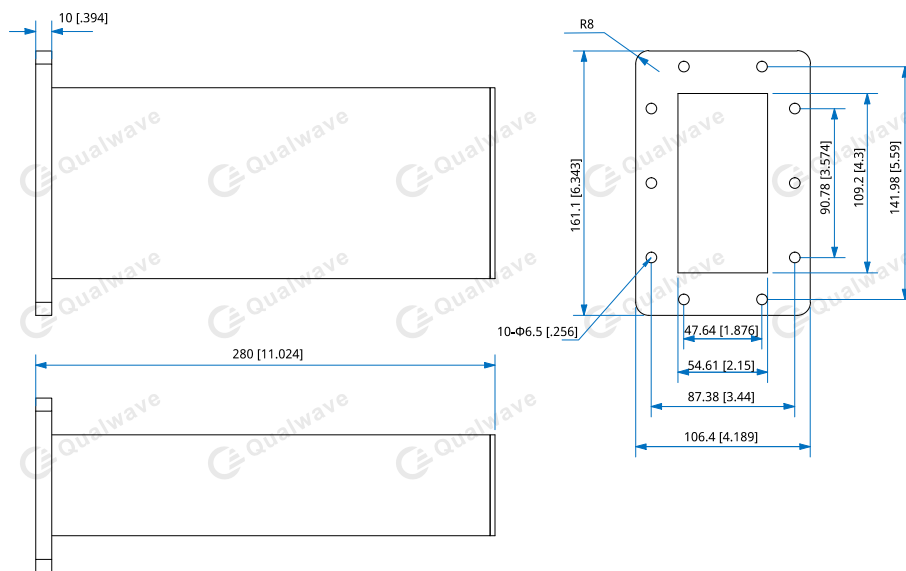

Outline A

Unit: mm [in]
Tolerance: ±0.5mm [±0.02in]

How To Order

QWT430-K1-Y-Z

Y : Material

Z : Flange type

Material naming rules:
A - Aluminum (Outline A)

Flange naming rules:

2 - FDP22 (Outline A)

Examples:

To order a low power waveguide termination, WR-430, 100W, Aluminum, FDP22, specify QWT430-K1-A-2.

Customization is available upon request.