

QWT650-K15 WR-650, 150W

Features:
* Low VSWR

Applications:
* Transmitters
* Antennas
* Laboratory Test
* Impedance Matching

Electrical

Frequency: 1.13~1.73GHz
Average Power: 150W
VSWR: 1.03 max.


Mechanical

Waveguide Size: WR-650 (BJ14)
Flange: FDP14

Environmental

Temperature: -55~+125°C

Outline Drawings

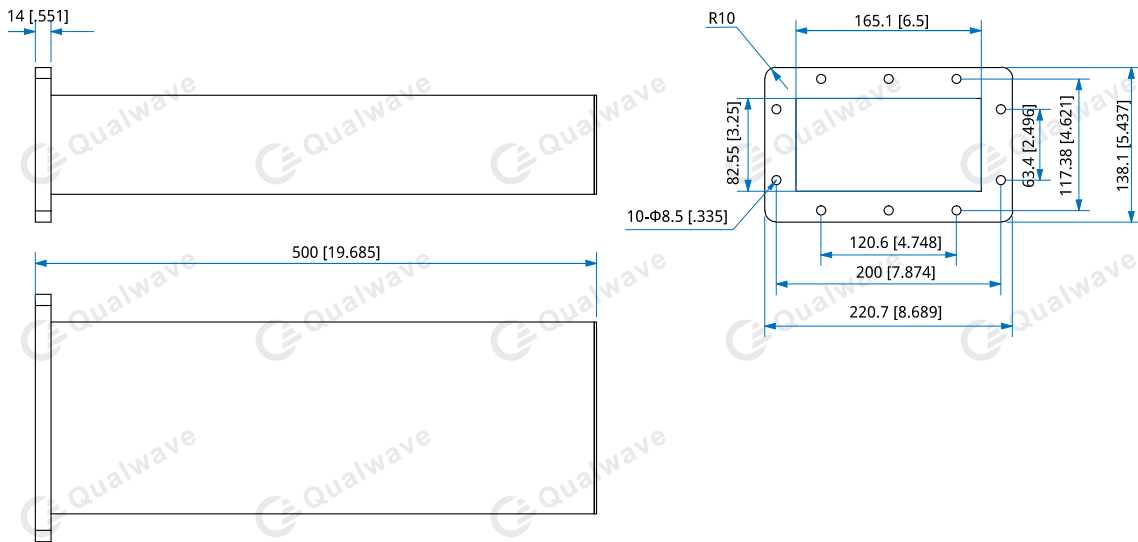

Outline A

Unit: mm [in]
Tolerance: ± 0.5 mm [± 0.02 in]

How To Order

QWT650-K15-Y-Z

Y : Material

Z : Flange type

Material naming rules:
A - Aluminum (Outline A)

Flange naming rules:

2 - FDP14 (Outline A)

Examples:

To order a low power waveguide termination, WR-650, 150W, Aluminum, FDP14, specify QWT650-K15-A-2.

Customization is available upon request.