

QWT75-30 WR-75, 30W

Features:
* Low VSWR

Applications:
* Transmitters
* Antennas
* Laboratory Test
* Impedance Matching

Electrical

Frequency: 9.84~15GHz
Average Power: 30W
VSWR: 1.03 max.
1.2 max. (FBM120)


Mechanical

Waveguide Size: WR-75 (BJ120)
Flange: FBP120/FBM120

Environmental

Temperature: -55~+125°C

Outline Drawings

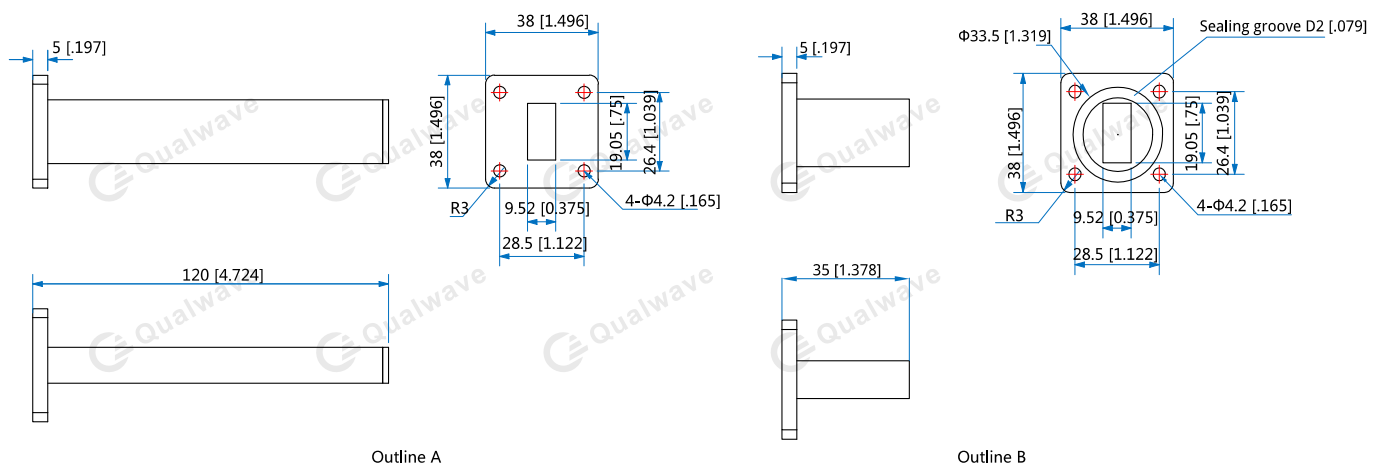

Unit: mm [in]
Tolerance: $\pm 0.5\text{mm}$ [$\pm 0.02\text{in}$]

How To Order

QWT75-30-Y-Z

Y : Material
Z : Flange type

Material naming rules:
A - Aluminum (Outline A, B)

Flange naming rules:
1 - FBP120 (Outline A)
3 - FBM120 (Outline B)

Examples:
To order a low power waveguide termination, WR-75, 30W, Aluminum, FBP120, specify QWT75-30-A-1.

Customization is available upon request.