Qualwave

Medium Power Waveguide Termination

# QWT229-K3

WR-229, 300W

Features:
* Low VSWR

Applications:
* Transmitters
* Antennas
* Laboratory Test
* Impedance Matching

## Electrical

| | |
|---|---|
| Frequency: | 3.22~4.9GHz |
| Average Power: | 300W |
| VSWR: | 1.2 max. |

## Mechanical

| | |
|---|---|
| Waveguide Size: | WR-229 (BJ40) |
| Flange: | FDP40 |

## Environmental

| | |
|---|---|
| Temperature: | -55~+125℃ |

## Outline Drawings

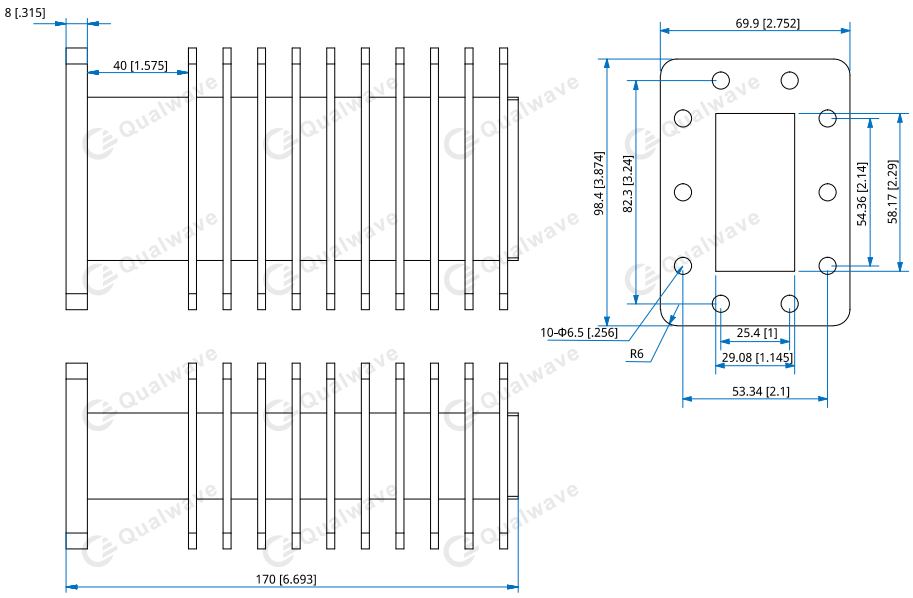


Outline A

Unit: mm [in]
Tolerance: ±0.5mm [±0.02in]

## How To Order

QWT229-K3-Y-Z

Y : Material
Z : Flange type

Material naming rules:
A - Aluminum (Outline A)

Flange naming rules:
2 - FDP40 (Outline A)

Examples:
To order a medium power waveguide termination, WR-229, 300W, Aluminum, FDP40, specify QWT229-K3-A-2.

Customization is available upon request.