

QBMT50 50W

Features:
* Low VSWR
* Broadband

Applications:
* Transmitters
* Antennas
* Laboratory Test
* Impedance Matching

Electrical

Frequency Range:	30~500MHz, 500~800MHz, 800~2200MHz
Average Power*1:	50W@25°C
VSWR:	1~6 (±7%)
Peak Power:	5KW (5μS pulse width, 1% duty cycle)

[1] Derated linearly to 10W@125°C.

Mechanical

Connector:	N, SMA, 7/16
Weight:	160g (Outline A) 755g (Outline B)
Housing:	Aluminum
Outer Conductor:	Nickel plated brass
Male Inner Conductor:	Gold plated brass
Female Inner Conductor:	Gold plated beryllium copper

Environmental

Temperature: -55~+125°C

How To Order

[QBMT50-30-500-Y-Z-V](#)

[QBMT50-500-800-Y-Z-V](#)

[QBMT50-800-2200-Y-Z-V](#)

Y: VSWR (1~6)

Z: Connector type

V: Outline Drawings

Connector type naming rules:

N - N male (Outline A, B)

S - SMA male

7 - 7/16 male

Outline Drawings naming rules:



A - Ø38*95mm (Outline A)

B - 90*130*75mm (Outline B)

Examples:

To order a termination, 30~500MHz, VSWR 1.5, N male,
Ø38*95mm, specify QBMT50-30-500-1.5-N-A.

Outline Drawings

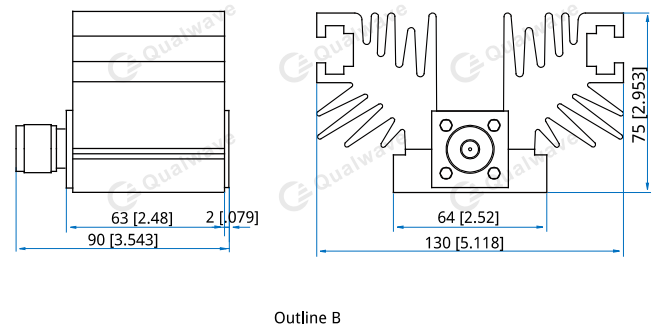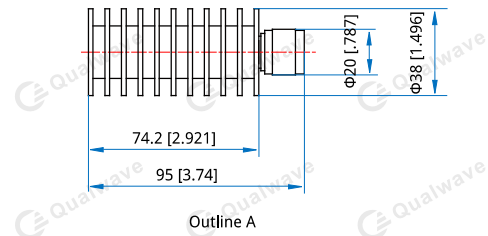

Unit: mm [in]

Tolerance: ±5%

Customization is available upon request.