

QMMTK1 100W

Features:
* Low VSWR
* Broadband

Applications:
* Transmitters
* Antennas
* Laboratory Test
* Impedance Matching

Electrical

Frequency Range: 0.85~0.96GHz
1.92~2.17GHz
Average Power: 100W

Frequency range (GHz)	VSWR	Calibrate Frequency (MHz)
0.85~0.96	1.2~5 (Variable)(±0.5)	905
1.92~2.17		2045


Mechanical

Connector: N Female
Weight: 1.6Kg
Housing: Aluminum
Outer Conductor: Nickel plated brass
Female Inner Conductor: Gold plated beryllium copper

Environmental

Temperature: -40~+65°C

Outline Drawings

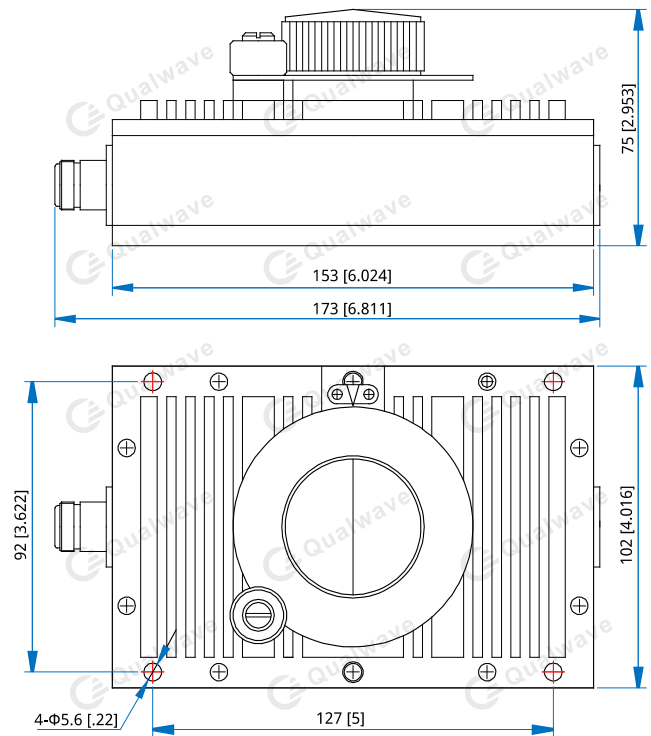

Unit: mm [in]
Tolerance: ±3%

How To Order

[QMMTK1-850-960-NF](#)
[QMMTK1-1920-2170-NF](#)

Customization is available upon request.