

QC-4-MB-01

DC~40GHz, SSMP Male

Features:
* Low VSWR

Applications:
* Wireless
* Radar
* Instruments
* Electronics



Electrical

Frequency: DC~40GHz
VSWR: 1.25 typ.
Impedance: 50Ω

Mechanical

Conductor: Gold plated brass
Dielectric: Glass
Connector*1: SSMP male
Detent Type: Smooth bore

[1] Mateable with GPPO, SMPM & Mini-SMP.

Environmental


Temperature: -55~+165°C

How To Order

QC-4-MB-01

Customization is available upon request.

Outline Drawings

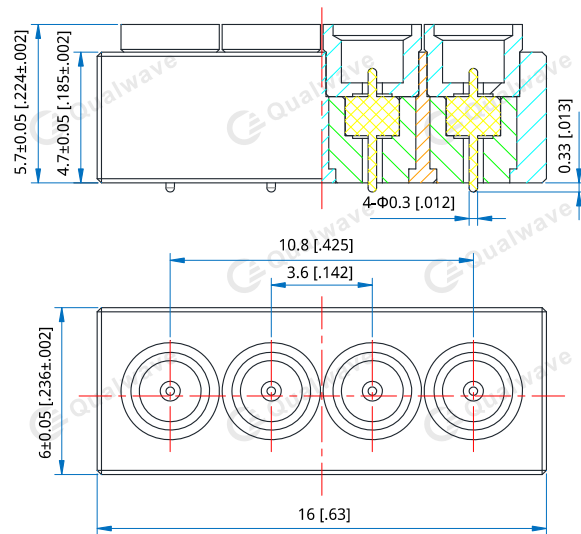

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]