

QMP3-1163-1588-1

1.163~1.19GHz, 1.214~1.241GHz, 1.562~1.588GHz

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Transceivers
- * Instrumentation

Electrical

Channel 1 (P1):	1.163~1.19GHz
Channel 2 (P2):	1.214~1.241GHz
Channel 3 (P3):	1.562~1.588GHz
Passband Insertion Loss:	1.5dB max.
	1.0dB max. @1.562~1.588GHz
Isolation:	70dB min.
Power:	50W CW
VSWR:	1.3 max.
Impedance:	50Ω

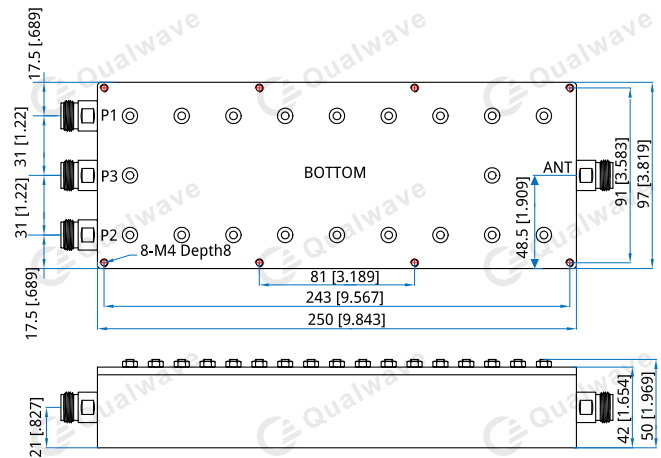
Mechanical

Size*1:	250*97*50mm
	9.843*3.819*1.969in
RF Connectors:	N female
Mounting:	8-M4 deep 8mm

[1] Exclude connectors.

Environmental

Operating Temperature:	-30~+70°C
------------------------	-----------

Outline Drawings


Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

QMP3-1163-1588-1

Customization is available upon request.