

# QPAS-2000-18000-40-40S

2~18GHz, 40dB, 40dBm

**Features:**

- \* Small Size
- \* Low Power Consumption

**Applications:**

- \* Wireless
- \* Transmitter
- \* Laboratory Test

**Electrical**

Frequency:	2~18GHz
Power Gain:	40dB min.
Gain Flatness:	±3.0dB typ.
Output Power (Psat):	40dBm min.
Harmonic:	-15dBc typ.
Spurious:	-60dBc max.
Input VSWR:	1.5 typ.
Output VSWR:	2.0 typ.
Voltage:	+220V AC

**Environmental**

Operating Temperature:	-20~+50°C
Non-operating Temperature:	-40~+85°C

**Mechanical**

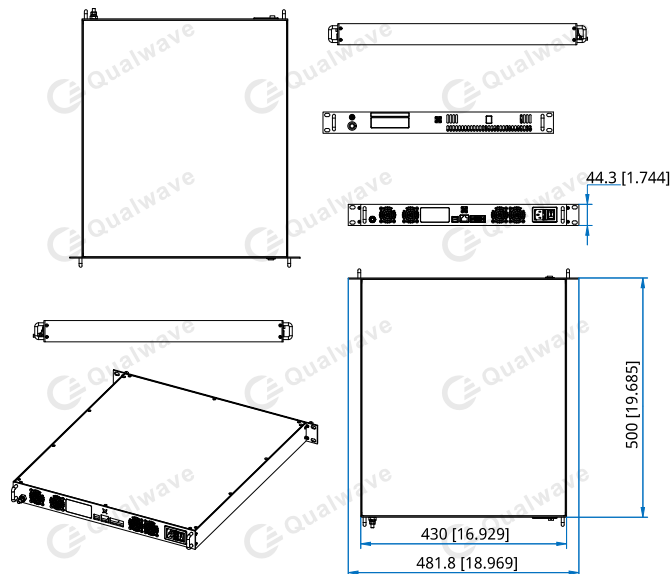
Size*1:	430*500*44.3mm
	16.929*19.685*1.744in
Connectors:	SMA Female
Cooling:	Built-in Forced Air Cooling

[1] Exclude connectors, rack mount brackets, handles.

**How To Order**

[QPAS-2000-18000-40-40S](#)

Customization is available upon request.

**Outline Drawings**


Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]