

## QPAS-23000-25000-40-43S

23~25GHz, 40dB, 43dBm

**Features:**

- \* Small Size
- \* Low Power Consumption

**Applications:**

- \* Wireless
- \* Transmitter
- \* Laboratory Test

**Electrical**

Frequency:	23~25GHz
Power Gain:	40dB min.
Gain Flatness:	±2.0dB typ.
Output Power (Psat):	43dBm max.
Spurious:	-60dBc max.
Input Power:	+10dBm max.
Input VSWR:	1.8 typ.
Voltage:	220V AC
Impedance:	50Ω

**Mechanical**

Size*1:	481.8*350*44.3mm
	18.969*13.78*1.744in
Weight:	15kg max
RF Connectors:	2.92mm

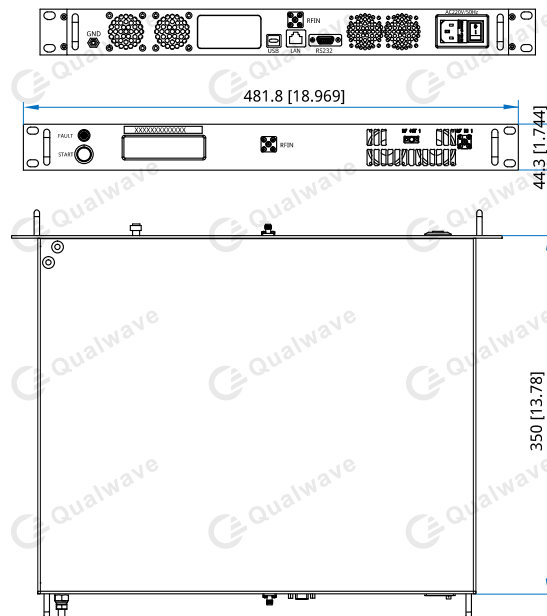
**Environmental**

Operating Temperature:	-20~+50°C
Non-operating Temperature:	-40~+85°C

**How To Order**

**QPAS-23000-25000-40-43S**

Customization is available upon request.

**Outline Drawings**


Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]