

# QPAS-24000-43000-30-30S

24~43GHz, 30dB, 30dBm

**Features:**

- \* Small Size
- \* Low Power Consumption

**Applications:**

- \* Wireless
- \* Transmitter
- \* Laboratory Test

**Electrical**

Frequency:	24~43GHz
Power Gain:	30dB min.
Intermodulation Rejection Ratio:	-40dBc@20dBm
Gain Flatness:	±3.0dB typ.
Output Power:	30dBm min.
Spurious:	-60dBc max.
Input Power:	+15dBm max.
Input VSWR:	2 typ.
Voltage:	220V AC
Impedance:	50Ω
Protection Function:	With reflected standing wave protection function.

**Mechanical**

Size:	481.8*500*44.3mm
	18.969*19.685*1.744in
RF Connectors:	2.4mm

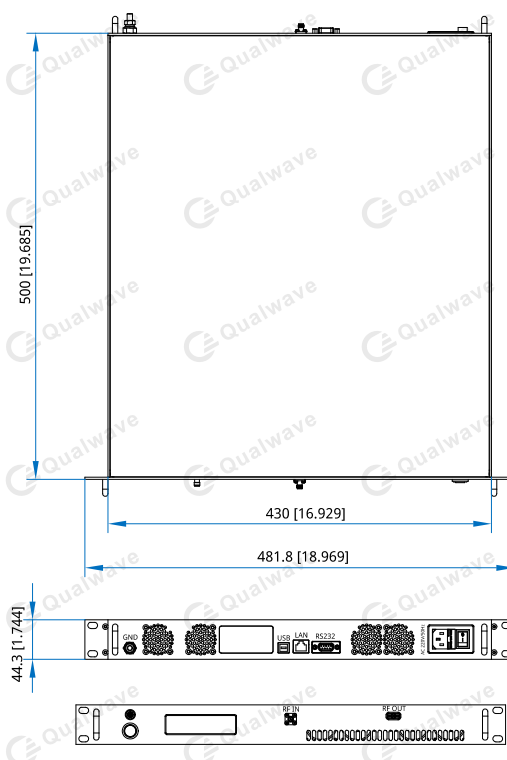
**Environmental**

Operating Temperature:	-20~+50°C
Non-operating Temperature:	-40~+85°C

**How To Order**

**QPAS-24000-43000-30-30S**

Customization is available upon request.

**Outline Drawings**


Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]