


# QPA-1-60-23-23

1~60MHz, 23dB, 23dBm

Features:  
 \* Small Size  
 \* Low Power Consumption

Applications:  
 \* Wireless  
 \* Transmitter  
 \* Laboratory Test



## Electrical

Frequency:	0.5~1000MHz
Gain:	23dB typ.
Noise Figure:	1.2dB typ.
Output Power (P1dB):	23dBm typ.
Input VSWR:	1.6 typ.
Output VSWR:	1.8 typ.
Voltage/Current:	+5V/300mA
Impedance:	50Ω

## Absolute Maximum Ratings\*1

RF Input Power:	+6dBm
Voltage:	+7V
Limiting Temperature:	-45~+80°C

[1] Permanent damage may occur if any of these limits are exceeded.

## Mechanical


Size*2:	32*30*12mm 1.26*1.181*0.472in
RF Connectors:	SMA female
Power Supply Connectors:	Feed Through/Terminal Post
Mounting:	4-Φ2.2mm through-hole

[2] Exclude connectors.

## Environmental

Operating Temperature:	-35~+75°C
------------------------	-----------

## Outline Drawings

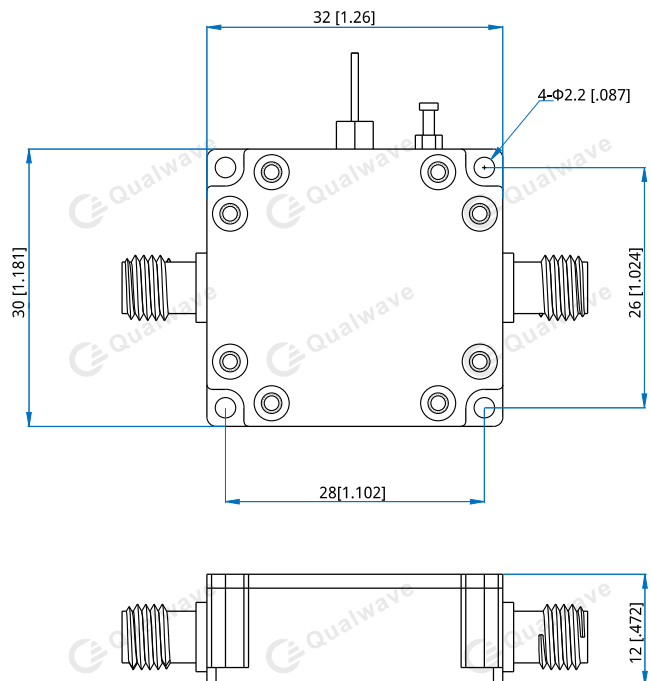

Unit: mm [in]  
 Tolerance: ±0.2mm [±0.008in]

## How To Order

**QPA-1-60-23-23**

Customization is available upon request.