

QPA-20-500-40-50S

20~500MHz, 40dB, 50dBm

Features:

- * Small Size
- * Low Power Consumption

Applications:

- * Wireless
- * Transmitter
- * Laboratory Test

Electrical

Frequency:	20~500MHz
Power Gain:	40dB min.
Gain Flatness:	±2.5dB max.
Output Power (Psat):	50dBm min.
Spurious:	-60dBc typ.
	DC~10GHz@Psat=50dBm
2 th Harmonic:	-12dBc typ.@Psat=50dBm
Input VSWR:	1.45 max.
Output VSWR:	2 max.
Voltage:	+32V DC max.
Input Power:	+13dBm max.

Mechanical

Size ^{*1} :	198*88*25mm
	7.795*3.465*0.984in
RF In Connectors:	SMA female
RF Out Connectors:	N female
Power Supply Interface:	Feed through
Mounting:	6-Φ3.2mm through-hole
Cooling:	Forced Air


[1] Exclude connectors.

Environmental

Operating Temperature:	-10~+50°C
------------------------	-----------

Outline Drawings

(The following pictures are for reference only, subject to the actual objects)

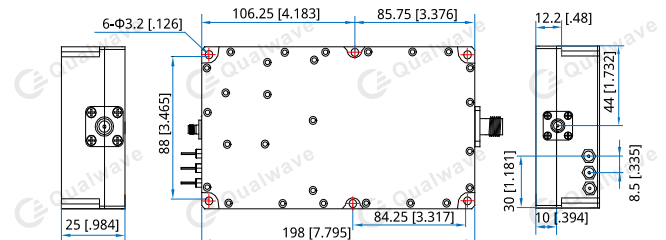

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

QPA-20-500-40-50S

Customization is available upon request.