

QPA-29500-31500-20-30

29.5~31.5GHz, 20dB, 30dBm

Features:

- * Small Size
- * Low Power Consumption

Applications:

- * Wireless
- * Transmitter
- * Laboratory Test

Electrical

Frequency:	29.5~31.5GHz
Small Signal Gain:	20dB min.
Gain Flatness:	±1dB typ.
Output Power (P1dB):	30dBm min.
Spurious:	-60dBc max.
VSWR:	2 max.
Voltage:	+12V DC
Current:	0.8A typ.
Impedance:	50Ω
EN:	TTL High: On TTL Low/NC: Off

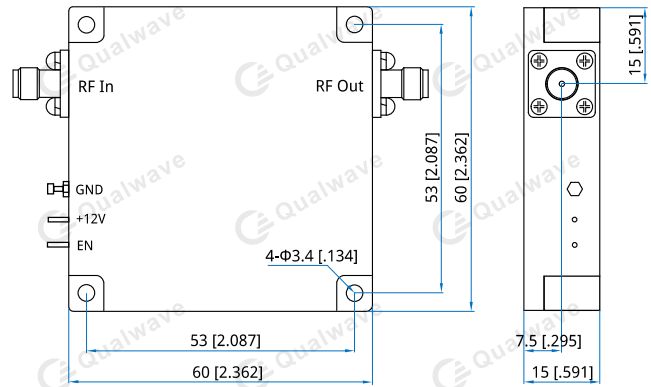
Mechanical

Size ^{*1} :	60*60*15mm 2.362*2.362*0.591in
Weight:	400g max.
RF Connectors:	2.92mm female
Power Supply Interface:	Feed through
Mounting:	4-Φ3.4mm through-hole

[1] Exclude connectors.

Environmental

Operating Temperature:	-10~+50°C
Non-operating Temperature:	-20~+60°C

Outline Drawings


Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

QPA-29500-31500-20-30

Customization is available upon request.