

# QPA-40000-60000-25-26S

40~60GHz, 25dB, 26dBm

**Features:**

- \* Small Size
- \* Low Power Consumption

**Applications:**

- \* Wireless
- \* Transmitter
- \* Laboratory Test

**Electrical**

Frequency:	40~60GHz
Small Signal Gain:	25dB typ.
Output Power (Psat):	26dBm min.
VSWR:	2 typ.
Voltage:	25V DC
Current:	3000mA typ.
Input Power:	30dBm max.
Impedance:	50Ω

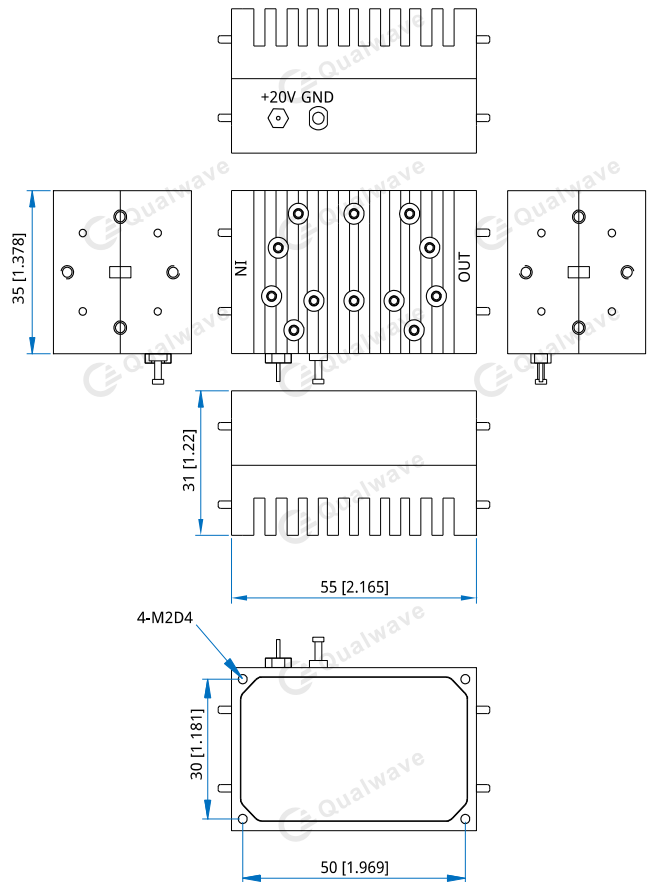
**Mechanical**

Size*1:	45*30*40mm 1.772*1.181*1.575in
Interface:	WR19 (BJ500)
Mounting:	4-M2mm depth 4mm

[1] Exclude connectors.

**Environmental**

Operating Temperature:	10~+40°C
Non-operating Temperature:	0~+50°C

**Outline Drawings**


Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

**How To Order**

**QPA-40000-60000-25-26S**

Customization is available upon request.