

## QSDC-1-10-K15-20-S

1~10MHz, 150W, 20dB

### Features:

- \* Broadband
- \* Low Insertion Loss

### Applications:

- \* Amplifiers
- \* Transmitter
- \* Laboratory Test
- \* Radar

### Electrical

Frequency:	1~10MHz
Insertion Loss:	0.2dB max.
Coupling:	20±0.5dB
Directivity:	20dB min.
VSWR:	1.2 max.
Average Power:	150W

### Mechanical


Size <sup>*1</sup> :	50.8*51*22.35mm 2*2.008*0.88in
Connectors:	SMA Female
Mounting:	2-Φ3.2mm through-hole

[1] Exclude connectors and terminations.

### Environmental

Operating Temperature:	-45~+100°C
Non-operating Temperature:	-55~+100°C

### Outline Drawings

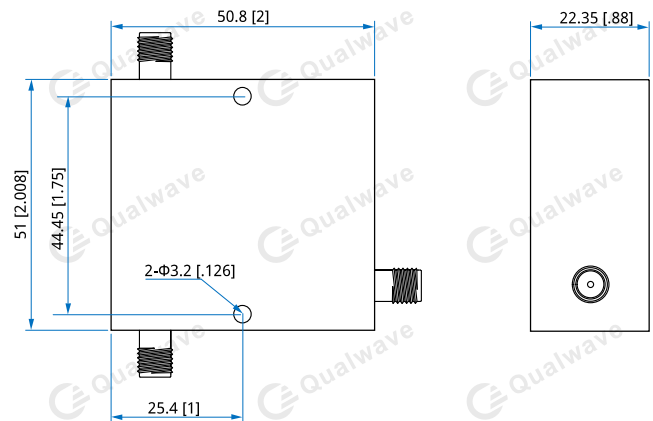

Unit: mm [in]

Tolerance: ±0.3mm [±0.012in]

### How To Order

**QSDC-1-10-K15-20-S**

Customization is available upon request.