

QSDC-1000-18000-K25

1~18GHz, 250W

Features:
 * Broadband
 * Low Insertion Loss

Applications:
 * Amplifiers
 * Transmitter
 * Laboratory Test
 * Radar

Electrical

Frequency: 1~18GHz
 Impedance: 50Ω
 Average Power: 250W max.

Coupling (dB)	Insertion Loss (dB max.)	VSWR (max.)	Coupling Flatness (dB max.)	Directivity (dB min.)
30±1.2	0.8	1.5 (Mainline)	±1	10
		1.6 (Coupling)		
40±1.2	0.8	1.5 (Mainline)	±1	10
		1.6 (Coupling)		

Mechanical

RF Connectors: N Female
 Coupling Connectors: SMA Female
 Mounting: 4-M3*5

Environmental

Operation Temperature: -55~+85°C
 Non-operation Temperature: -55~+100°C

How To Order

QSDC-1000-18000-K25-X-Y


X: Coupling:
 30, 40dB - Outline A
 Y: Connector type

Connector naming rules:
 NS - N Female & SMA Female

Examples:
 To order a signal directional coupler, 1~18GHz, 250W, 30dB, N Female & SMA Female, specify QSDC-1000-18000-K25-30-NS.

Customization is available upon request.

Outline Drawings

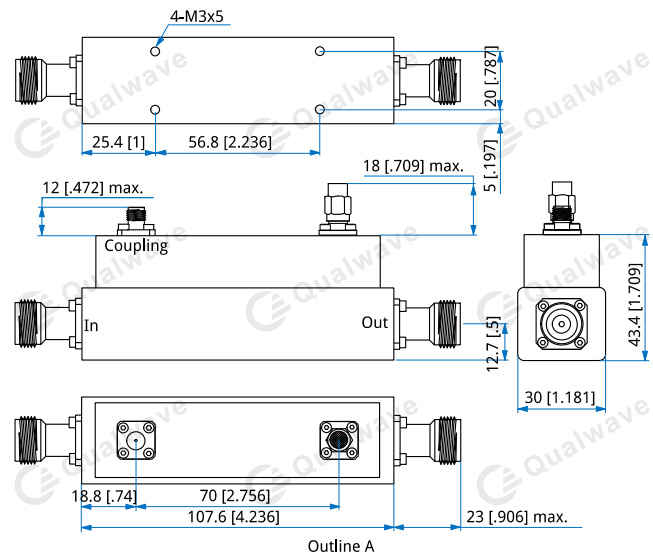

Unit: mm [in]
 Tolerance: .xx±0.5mm [±0.02in], .xx±0.1mm [±0.004in]