

QSDC-2000-18000-K2-50-NS

2~18GHz, 200W, 50dB

Features:

- * Broadband
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency:	2~18GHz
Insertion Loss:	0.6dB max.
Coupling:	50±2dB
Coupling Flatness:	±1.5dB max.
Directivity:	10dB min.
VSWR (Mainline):	1.5 max.
VSWR (Coupling):	1.6 max.
Average Power:	200W

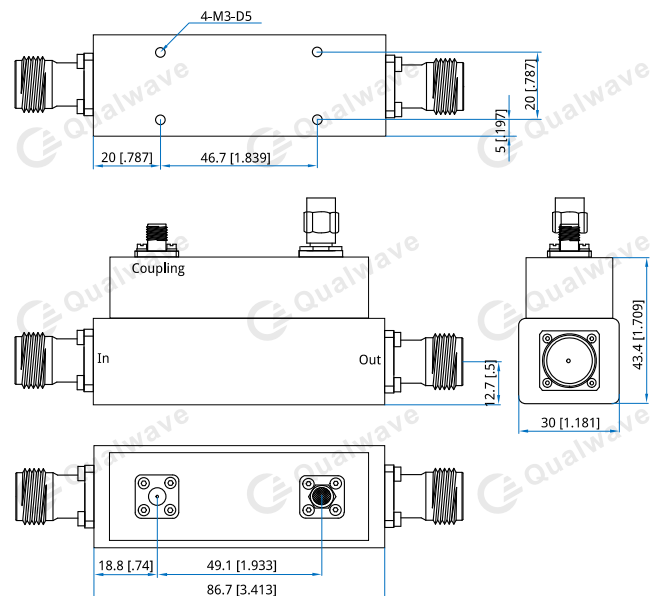
Mechanical

Size ^{*1} :	86.7*30*43.4mm 3.413*1.181*1.709in
Connectors:	N Female, SMA Female
Mounting:	4-M3, depth 5mm

[1] Exclude connectors and terminations.

Environmental

Operating Temperature:	-55~+85°C
Non-operating Temperature:	-55~+100°C

Outline Drawings


Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

How To Order

[QSDC-2000-18000-K2-50-NS](#)

Customization is available upon request.