

QSDC-300-8000-20-20-S

0.3~8GHz, 20W, 20dB

Features:

- * Broadband
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency:	0.3~8GHz
Insertion Loss:	1.3dB max.
VSWR:	1.35 max.
Directivity:	18dB min.
Coupling:	20±1dB
Average Power:	20W

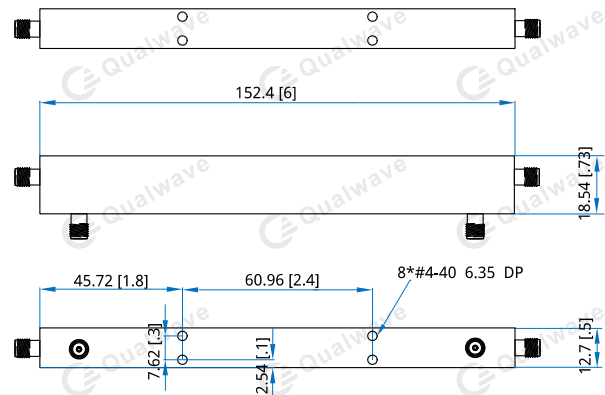
Mechanical

Size ^{*1} :	152.4*18.54*12.7mm 6*0.73*0.5in
Connectors:	SMA Female
Mounting:	8*#4-40 6.35 DP

[1] Exclude connectors and terminations.

Environmental

Operating Temperature:	-45~+85°C
Non-operating Temperature:	-55~+100°C

Outline Drawings


Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

How To Order

[QSDC-300-800-20-20-S](#)

Customization is available upon request.