

## QSDC-400-20000-10-20-S

0.4~20GHz, 10W, 20dB

### Features:

- \* Broadband
- \* Low Insertion Loss

### Applications:

- \* Amplifiers
- \* Transmitter
- \* Laboratory Test
- \* Radar

### Electrical


Frequency:	0.4~20GHz
Insertion Loss:	1.5dB max.
Coupling:	20±1.5dB
Directivity:	10dB min.@0.4~16GHz 8dB min.@16.1~20GHz
VSWR:	1.5 max.
Impedance:	50Ω
Average Power:	10W

### Mechanical

Size <sup>*1</sup> :	137*15.5*11mm 5.394*0.61*0.433in
Connectors:	SMA Female
Mounting:	4-Φ2.2mm through-hole 4-M2, depth 5mm

[1] Exclude connectors and terminations.

### Outline Drawings

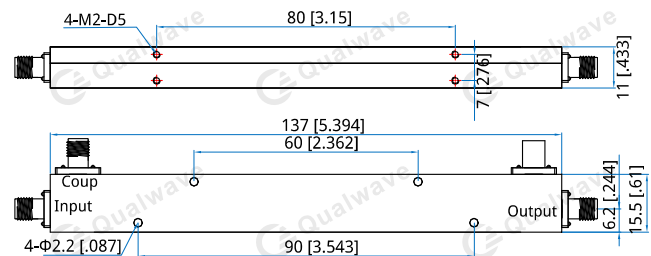

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

### How To Order

**QSDC-400-20000-10-20-S**

Customization is available upon request.