

QSDC-500-18500-20-10-S

0.5~18.5GHz, 20W, 10dB

Features:

- * Broadband
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Transmitter
- * Laboratory Test
- * Radar

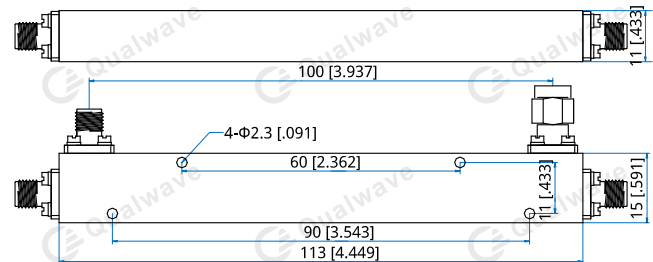
Electrical

Frequency:	0.5~18.5GHz
Insertion Loss:	1.6dB max.
VSWR:	1.6 max.
Directivity:	10dB min.
Coupling:	10±1dB
Coupling Flatness:	±1dB max.
Impedance:	50Ω
Average Power:	20W max.

Mechanical

Size ^{*1} :	113*15*11mm 4.449*0.591*0.433in
Connectors:	SMA Female
Mounting:	4-Φ2.3mm through-hole

[1] Exclude connectors and terminations.

Outline Drawings


Unit: mm [in]

Tolerance: ±0.3mm [±0.012in]

How To Order

QSDC-500-18500-20-10-S

Customization is available upon request.